


Boiling water heater Hydroboil®

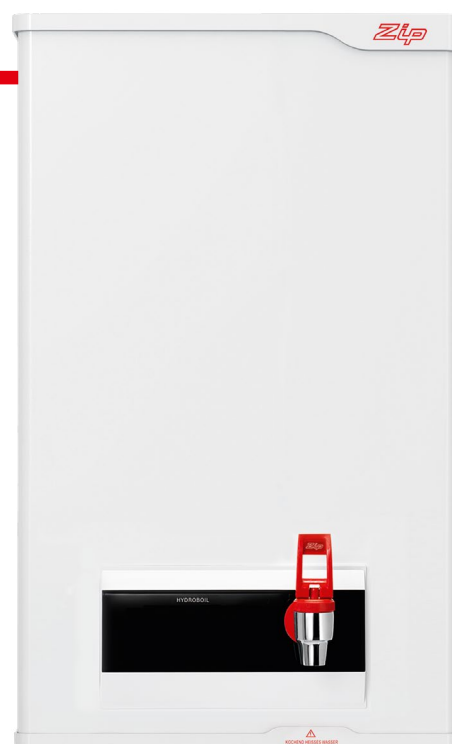

Application areas

Boiling water supply:

- > Offices
- > Canteens / Bistros
- > Restaurants / Hotels
- > Hospitals
- > Catering services









Boiling water heater

Hydroboil®

Product information



	boiling > 	 		
	Hydroboil® 15	Hydroboil® 25	Hydroboil® 40	
Part number [case painted white]:	4100-44715	4100-44725	4100-44740	
Water connection (thread connection):	G ½"			
Temperature range [°C]:	99 - 100			
Boiling water content [litres / cups ¹⁾]:	15 / 90	25 / 150	40 / 240	
Capacity boiling water [litres / cups ¹⁾ / h]:	154	154	240	
Reheating time [cups ¹⁾ / min]:	2,5	2,5	4	
Heating time for complete filling ²⁾ [min]:	40	47	60	
Nominal power rating [kW]:	2.8	2.8	5.6	
Power supply:	1~ / N / PE 230V AC		2~/N/PE 2 × 230V AC	
Function indicator:	✓			
Protection class:	IP 20			
Dimensions height × width × depth [cm]:	60.0 × 39.0 × 29.9	78.0 × 39.0 × 30.0	84.0 × 51.5 × 28.4	
Connecting cable:	 direct connection			
Weight (filled) [kg]:	34.5	47.0	71.0	

1) Standard cup with 167 ml 2) At 10 °C cold water temperature

Description

- > Instant boiling water heater for continuous supply of boiling water in large quantities
- > Thermostatically controlled, twin-chamber technology with stainless steel boiling tank prevents the mixing of cold and hot water
- > Premium insulation and cool touch two way valve with safety lock
- > Dispensing valve for convenient filling of tea or coffee pots or single cups
- > No escaping steam – the steam is used internally to heat the incoming water
- > Two service openings for problem-free decalcification
- > Safety thermal shutdown

Dispensing valve

The two-way safety dispensing valve has two positions:

1. Normal position:

for cup filling



The boiling water flows when the lever be pulled forwards.

The position of the lever determines the water flow. If the lever is released, the water stops immediately in this mode.

2. Locking position:

for convenient jug filling



To do this, turn the lever 180 degrees from the normal position.

The boiling water flows when the lever is pulled towards itself until it clicks into place. In this position, a vessel can be filled without having to hold the lever.

Boiling water heater

Hydroboil®

Installation




Dimensions in mm

The outlet of the automatic boiling water heater must be located above the sink or the drip tray. The bottom edge of the outlet should not be less than 200 mm above the drip tray. If larger vessels are to be filled, the distance must be increased.

The example shows the installation of a Hydroboil®15 as flush installation with visible collecting funnel. Alternatively, a surface installation with a pipe section is possible.

For maintenance work, a minimum clearance of 150 mm above, 120 mm left and 20 mm right must be observed.

Assembly and operating instructions must be observed upon installation.

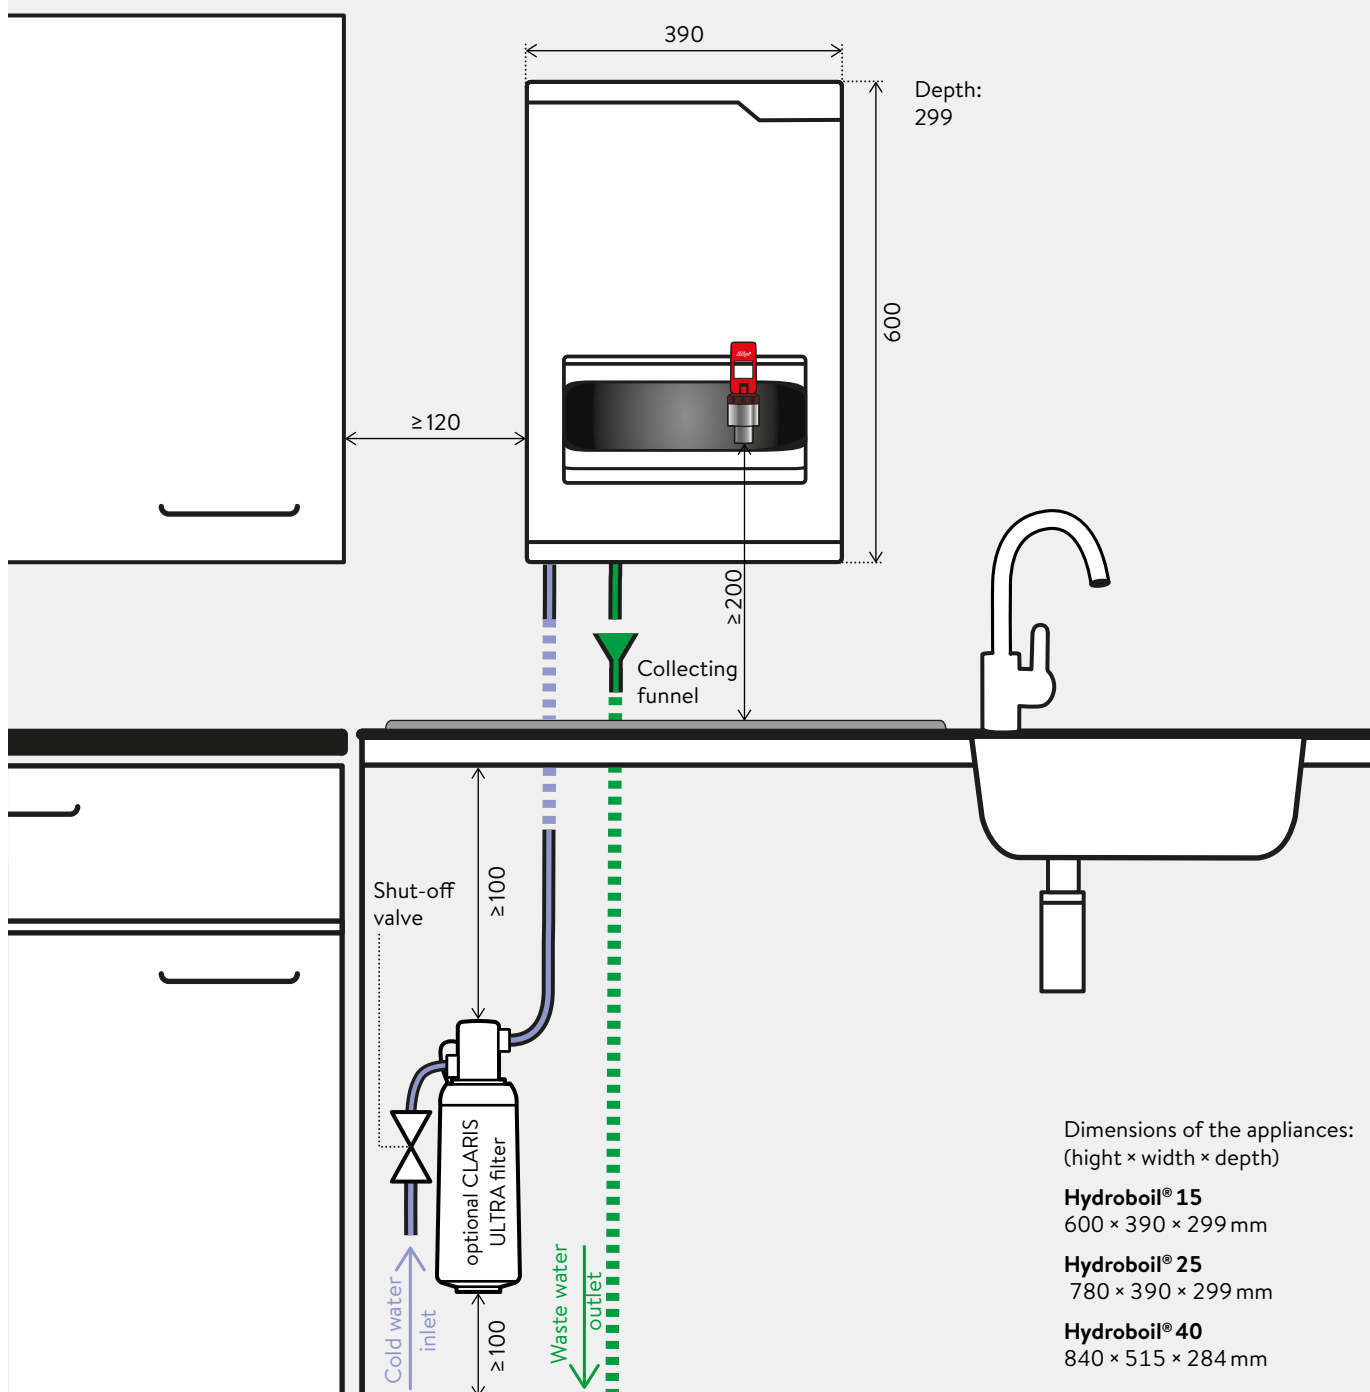


Boiling water heater Hydroboil® Installation

The example shows the water connections when installing a Hydroboil®15, as flush installation with visible collecting funnel.


Dimensions in mm

Assembly and operating instructions must be observed upon installation.

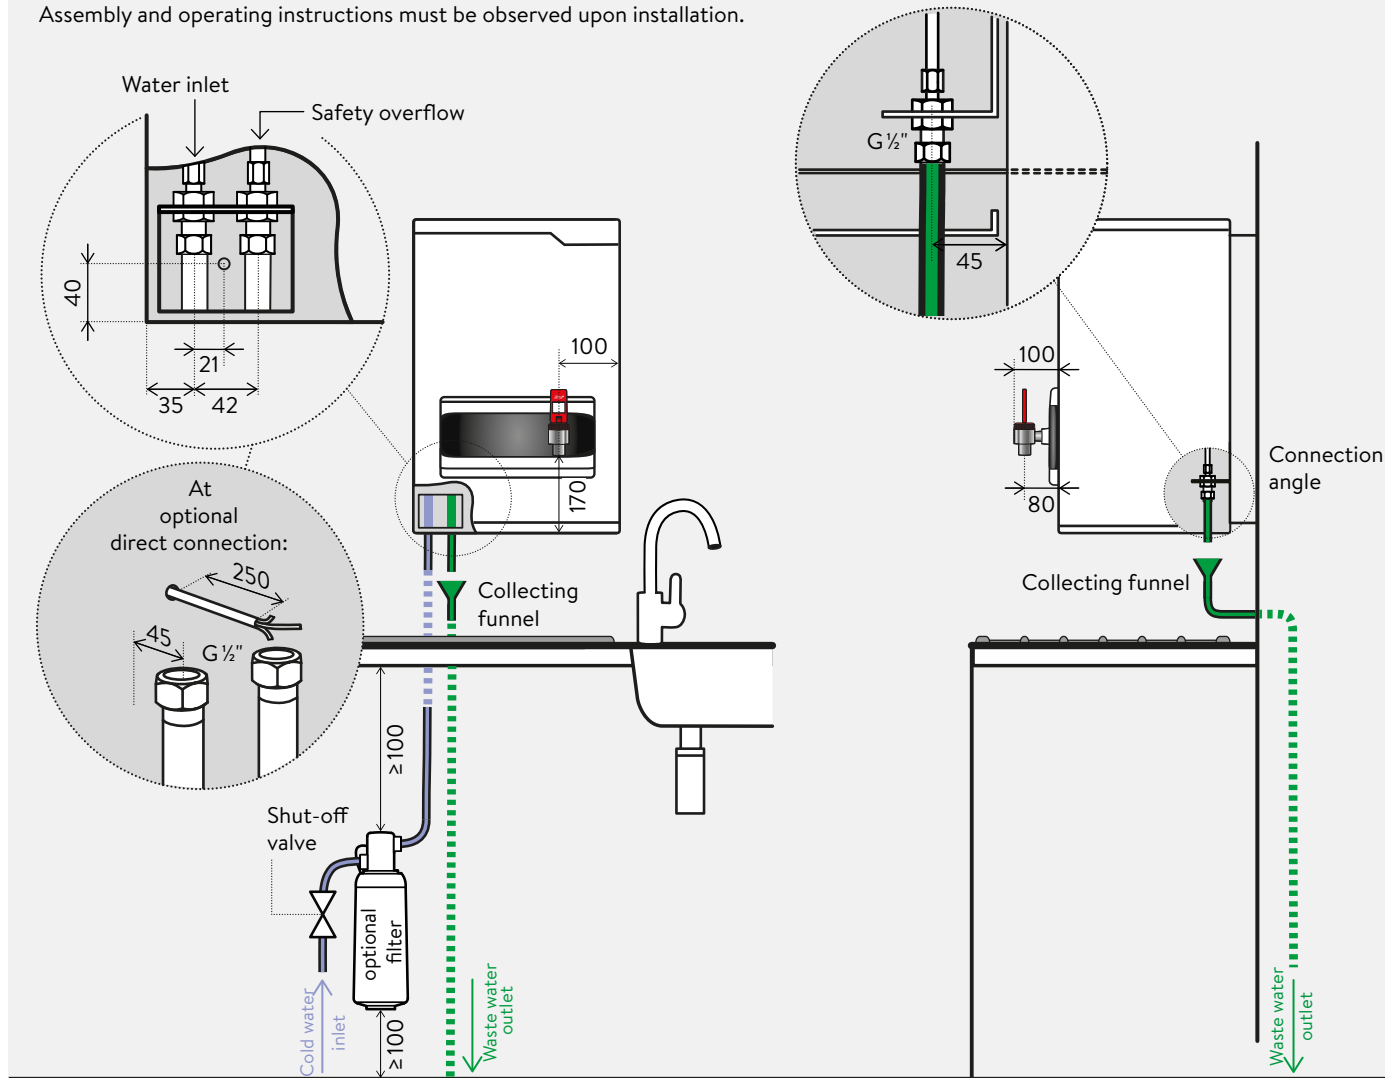


Surface mounting with visible collecting funnel

In this case, a commercial funnel must be set for the overflow. The safety overflow must be lengthened by means of a pipe, its end visible outside the appliance leads in the funnel.

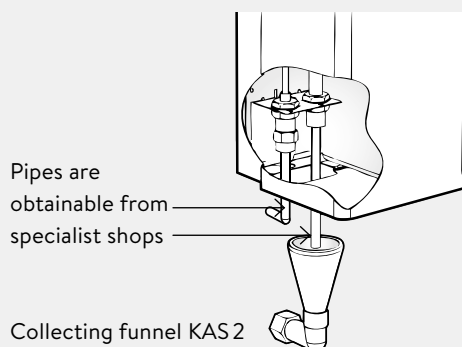


Surface mounting with tube

In this case, a 1/2-inch screw connection is used to connect a pipe (Ø = min. 12 mm) to the safety overflow. Its other end leads to the drainage of the sink in a visible place protected from scalding.

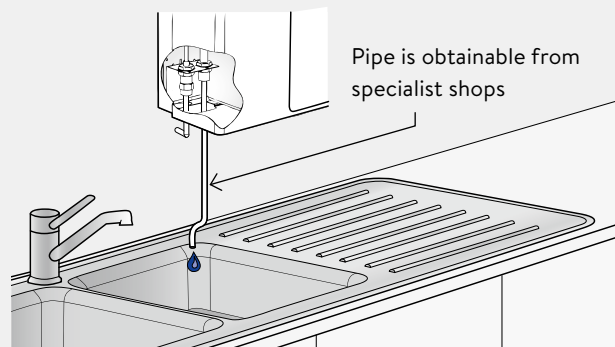


Boiling water heater
Hydroboil®
Accessories

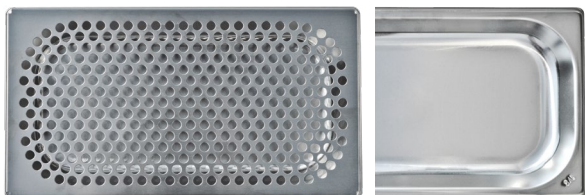

KAT1 (optional)

Stainless steel-tableau, 32.5 × 17.5 cm

KAT1: Part no. 4100-44080

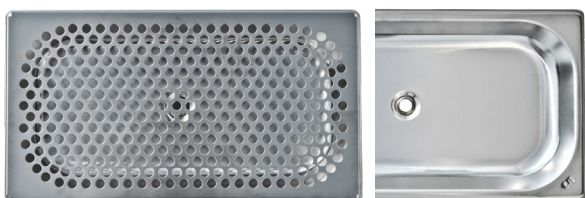

KAT2 (optional)

Stainless steel-tableau with drain connection,
32.5 × 17.5 cm

KAT2: Part no. 4100-44081



KAS1 (optional)

Collecting funnel for undersink installation, 3/4-inch

KAS1: Part no. 4100-44085



KAS2 (optional)

Collecting funnel for wall installation, 3/4-inch

KAS2: Part no. 4100-44086

Boiling water heater Hydroboil® Accessories



KA AZ (optional)

Connection set for 1 or 2 additional side dispensing valves for Hydroboil®15 and Hydroboil®25


KA AZ: Part no. 84426



KA A (optional)

Connection set for 1 or 2 additional side dispensing valves for Hydroboil®40

KA A: Part no. 84427

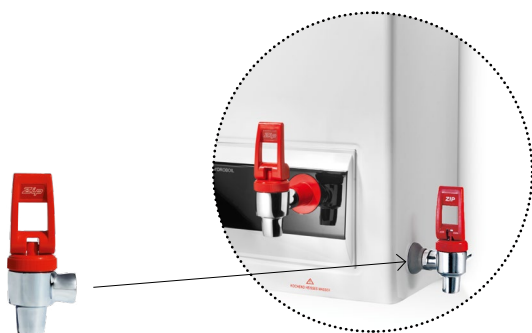

KA Z (optional)

Additional dispensing valve for Hydroboil®15..40

KA Z: Part no. 84321



Filter system for water softening KKF

For hard, calcareous water, the KKF filter system should also be used (recommended for water from 10 °KH).

Filter head suitable for KKF filters

Filter head FK: Part no.: 845071

Filter cartridge, capacity at 10 °KH 3.000 litres

KKF: Part no.: 845064



Connection set AS-KSF

Connection set for installing the filter to the cold water inlet of the water system or for connecting the tap.

Connection set AS-KSF: Part no.: 845072



AquaBion limescale converter

Maintenance-free limescale converter system with zinc anode and brass housing as an alternative for reducing limescale build-up. For installation directly in the 1/2-inch cold water inlet of the appliance.

AquaBion: Part no.: 845065